


MP ALAMENTTI DESIGN EPS_F ONE

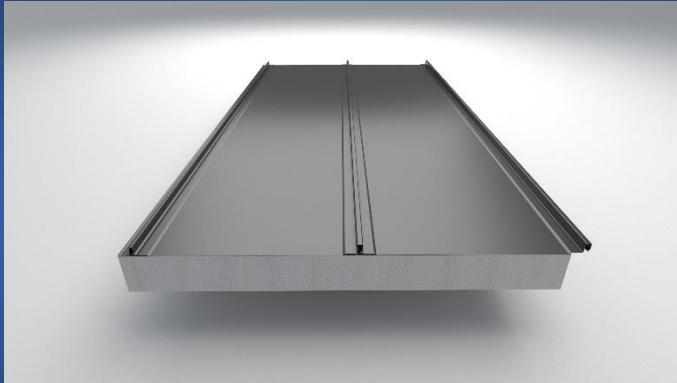

INSULATED FACADE PANEL WITH SHEET FASING MADE IN TRADITIONAL PROFILING USING THE SO-CALLED SEAM, ON A STYROFOAM CORE $\lambda=0,038$, OF ANY THICKNESS, EASY TO INSTALL

BASIC PARAMETERS OF THE PANEL

Application	Wall and roof insulation sandwich panel					
Core thickness	Styrofoam EPS $\lambda=0,038$					
Nominal thickness [cm]	10	12	15	20	22	25
Uc [W/(m ² K)]	0,36	0,30	0,25	0,19	0,17	0,15
Weight [kg/m ²]	6,1	6,4	6,85	7,6	7,9	8,35
Airborne sound insulation [dB]	NDP					
Modular width [mm]	1000 mm					
Maximum production length [m]	12,5 m					
Recommended length [m]	Color groups	I – very light colors		9		
		II – light colors		6,5		
		III – dark colors		6,5		
Material for facing	External Facing			Galvanized steel		
Coating for facing	External Facing			Granite Deep Mat 25		
Type of profiling	External Facing			Rąbek classic		
				Rąbek duo		
				Rąbek mikrofala		
Standard colors [RAL]	External Facing	8004, 3009, 6020, 8017, 8019, 7024, 7016, 9005				
Fire resistance	NRO					

TYPES OF PROFILING

RĄBEK CLASSIC



RĄBEK DUO



RĄBEK MIKROFALA

